

SPECIFICATIONS

OUTDOOR

HOUSING

- Heavy duty die cast aluminum housing
- Stainless steel hardware
- White powdercoat finish
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- 0-10V Dimmable driver standard
- Operating Temperature: -40°F (-40°C) - 104°F (40°C)

OPTICAL SYSTEM

- Diffused polycarbonate lens
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- 190,000 Lumens @ L₇₀
- CRI > 71
- Available in 4000K
- VS (very short) distribution

MOUNTING

- Fixtures attach to canopy surface and can cover up to 15" holes
- Safety cable and a wireway cover are provided for ease of wiring

CODE COMPLIANCE

- cETLus Listed for Wet Locations
- Meets UL Requirements
- IP65 Rated

WARRANTY

- 5 Year
- 10 Year Available

ORDERING INFORMATION

MODEL#	Wattage	Lumens	Color	Distribution
VR21-E-20L-QT-40K	20W	2,352	4000K	
VR21-E-36L-QT-40K	36W	4,227	4000K	


Consult factory for other options/color temps with extended lead time

OPTIONS (Factory Installed)


10YR - 10 Year Warranty



VR21-E LED Recessed Canopy

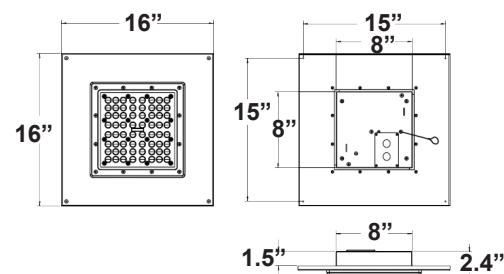

PHOTOMETRICS

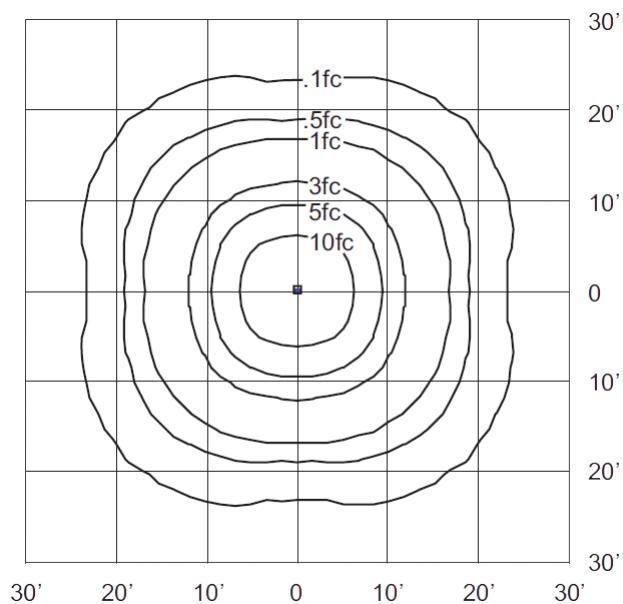

VR21-E-36L-QT-40K
Mounting Height: 10'