

SPECIFICATIONS

OUTDOOR

HOUSING

- Heavy duty die cast aluminum housing
- Anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V Dimmable driver standard
- Operating Temperature: -20°C (-4°F) - 40°C (104°F)
- THD < 10%
- Power Factor > 0.9

OPTICAL SYSTEM

- Frosted prismatic polycarbonate lens
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- 50,000 Hours @ L₇₀
- CRI ≥ 80
- MCT: Switchable between 3500K, 4000K, and 5000K

MOUNTING

- Surface mount

CODE COMPLIANCE

- cULus Listed for Wet Locations
- DLC Premium Listed
- FCC Compliant
- RoHS Compliant

WARRANTY

- 5 Year



VR24-S-MCT LED Selectable Canopy

ORDERING INFORMATION


CATALOG#	Wattage	Lumens	CCT
VR24-S-2L-QT-MCT	60W/ 80W/ 100W	7800 / 10,400 / 13,000 Lms	35K/ 40K/ 50K

OPTIONS (Factory Installed)

- EM - LED Emergency Battery, 8W

ACCESSORIES (Ships on Side)

- | | |
|-----------|---|
| HD07VR-MH | - Smart Sensor Cap for Photocell with Microwave BiLevel Motion Sensor |
| HD07VR-PH | - 12VDC PIR BiLevel Daylight Highbay 3-Pin Smart Sensor |
| HD09VR-PH | - 12VDC PIR BiLevel Daylight 3-Pin Smart Sensor with Rotator Switches |
| HD09VR-MH | - 12VDC PIR Microwave Daylight 3-Pin Smart Sensor with Rotator Switches |
| HD06R | - Sensor Remote Control with LCD Display (HD Series) |

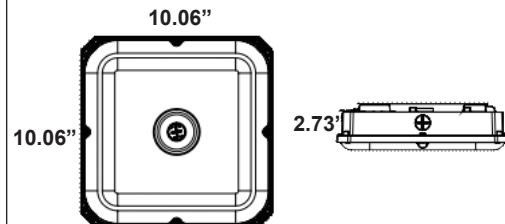

ELECTRICAL INFORMATION

Catalog #	Input Amps (A)	
	120V	277V
VR24-S-2L (35K)	0.55A	0.24A
VR24-S-2L (40K)	0.73A	0.32A
VR24-S-2L (50K)	0.92A	0.40A