

SPECIFICATIONS

OUTDOOR

HOUSING

- Heavy duty die cast aluminum housing

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V Dimmable driver standard
- Operating Temperature: -40°C (-40°F) - 45°C (113°F)
- THD < 10%
- Power Factor > 0.9

OPTICAL SYSTEM

- Frosted prismatic polycarbonate lens
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- 50,000 Hours @ L₇₀
- CRI ≥ 80
- MCT: Switchable between 3500K, 4000K, and 5000K

MOUNTING

- Surface mount

CODE COMPLIANCE

- cULus Listed for Wet Locations
- DLC Premium Listed
- FCC Compliant
- RoHS Compliant

WARRANTY

- 5 Year



VR24-S-MCT LED Selectable Canopy

ORDERING INFORMATION


CATALOG#	Wattage	Lumens	CCT
VR24-S-1L-QT-MCT	40W/ 60W/ 80W	5200 / 7800 / 10,400 Lms	35K/ 40K/ 50K
VR24-S-2L-QT-MCT	60W/ 80W/ 100W	7800 / 10,400 / 13,000 Lms	35K/ 40K/ 50K

OPTIONS (Factory Installed)

HD07VR-MH	- 10-15V 3-Pin Bi-Level Daylight Sensor
HD07VR-MHB	- 10-15V 3-Pin Bi-Level Daylight Sensor for Haisen Blue App
HD07VR-PH	- 10-15V 3-Pin PIIR Bi-Level Daylight Sensor
HD07VR-PHB	- 10-15V 3-Pin PIR Bi-Level Daylight Sensor for Haisen Blue App
EM	- Installed 8W Battery

ACCESSORIES (Ships on Side)

HD03R	- Sensor Remote (Analog)
HD06R	- Sensor Remote (Digital)

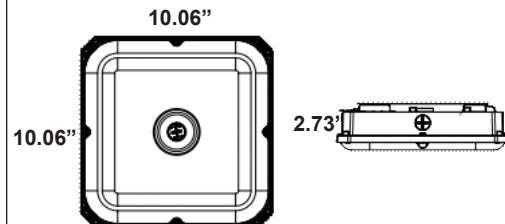

ELECTRICAL INFORMATION

Catalog #	Input Amps (A)	
	120V	277V
VR24-S-1L (35K)	0.44A	0.16A
VR24-S-1L (40K)	0.66A	0.24A
VR24-S-1L (50K)	0.88A	0.32A
VR24-S-2L (35K)	0.55A	0.24A
VR24-S-2L (40K)	0.73A	0.32A
VR24-S-2L (50K)	0.92A	0.40A