

SPECIFICATIONS

INDOOR

HOUSING

- Polycarbonate Gray Housing
- Stainless steel clips
- 2', 4', and 8' models available
- Easy installation in new construction or retrofit

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10vdc dimmable driver standard
- Operating Temperature: -20°C - 45°C (-4°F - 113°F)
- Power factor > .90
- THD < 10%

OPTICAL SYSTEM

- Anti-UV Frosted Polycarbonate Lens
- CRI > 80
- 5CT: Selectable between: 35K/40K/50K/57K/65K
- 50,000 @ L₇₀

MOUNTING

- Stainless steel mounting clips included

CODE COMPLIANCE

- cETLus Listed for Wet Locations
- IP65 Rated
- IK08 Rated
- DLC Premium Listed
- FCC Compliant
- RoHS Compliant

WARRANTY

- 5 Year



VT1.5-S-5CT

Wattage and Color


Selectable Vapor Tight

ORDERING INFORMATION

CATALOG #	Wattage	Lumens	CCT
VT1.5-S-2X1L-QT-5CT	12W - 25W	1560 - 3250 Lm	35K/40K/50K/57K/65K
VT1.5-S-4X1L-QT-5CT	25W - 50W	3250 - 6250 Lm	35K/40K/50K/57K/65K
VT1.5-S-8X1L-QT-5CT	50W - 100W	6250 - 12500 Lm	35K/40K/50K/57K/65K

OPTIONS (Factory Installed)

SGP - 10kV Surge Protection

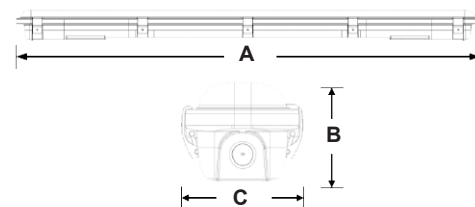

	A	B	C
2X1L	23.60"	3.15"	3.74"
4X1L	47.20"	3.15"	3.74"
8X1L	94.50"	3.15"	3.74"