

SPECIFICATIONS

INDOOR

HOUSING

- One-piece compression-molded polycarbonate housing
- Continuous poured in-place gasket
- Water tight hub for 1/2" conduit entry provided
- Impact resistant acrylic diffuser held with positive cam latches
- Stainless steel latches
- Dirt and moisture resistant

ELECTRICAL

- Electronic, QUAD Tap (QT) 120-277V ballast
- Dimmable Driver standard
- 347V driver available

MOUNTING

- Surface Mount

CODE COMPLIANCE

- ETL Listed for Wet Locations
- Meets UL Requirements
- IP65
- RoHS Compliant

WARRANTY

- 5 Year Warranty
- 10 Year Available





VT10-Q LED Vapor Tight

Ordering Information

CATALOG#	Size	Wattage	Lumens	Color
VT10-Q-21L-QT-50K	2'	21W	2,000 Lumens	5000K
VT10-Q-42L-QT-50K	4'	42W	4,014 Lumens	5000K

OPTIONS (Factory Installed)

OCS20	-	Occupancy Sensor (20' Height)
OCS40	-	Occupancy Sensor (40' Height)
347V	-	347V Driver (4' model only)
10YR	-	10 Year Warranty

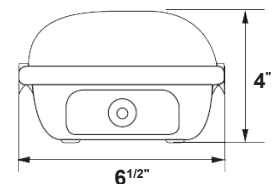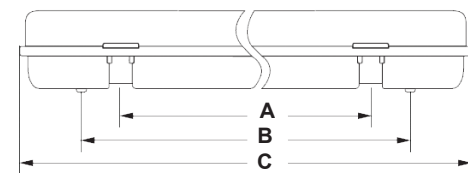

	A"	B"	C"
2'	15 ^{3/4}	19 ^{3/4}	26
4'	35 ^{1/2}	39 ^{3/8}	50