

SPECIFICATIONS

INDOOR

HOUSING

- Die -formed heavy gauge cold rolled steel housing
- Embossed ends are locked and secure to the housing
- Available in standard and wide housing
- Suitable for individual or continuous runs

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- Dimmable driver standard

OPTICAL SYSTEM


- Clear Diffuser
- CRI > 82
- Available in 3000K - 5000K

CODE COMPLIANCE

- cETLus Listed for Damp Locations
- Meets UL Requirements
- ARRA Compliant

WARRANTY

- 5 Year
- 10 Year Available

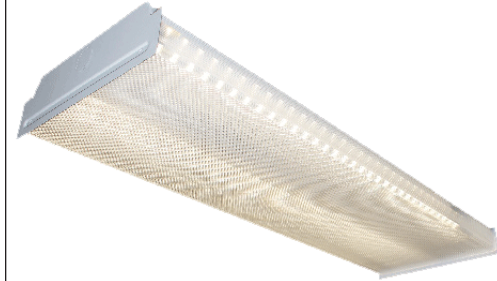

WA2 LED Wraparound

ORDERING INFORMATION

MODEL#	Size	Wattage	Lumens
WA2-2X23L-QT-*	2'	23W	2,750 Lumens
WA2-2X28L-QT-*	2'	28W	3,280 Lumens
WA2-2X35L-QT-*	2'	35W	4,330 Lumens
WA2-2X32WL-QT-*	2' Wide	32W	3,760 Lumens
WA2-2X48WL-QT-*	2' Wide	48W	5,700 Lumens
WA2-2X57WL-QT-*	2' Wide	57W	6,500 Lumens
WA2-4X23L-QT-*	4'	23W	2,930 Lumens
WA2-4X35L-QT-*	4'	35W	4,370 Lumens
WA2-4X48L-QT-*	4'	48W	5,750 Lumens
WA2-4X56L-QT-*	4'	56W	6,570 Lumens
WA2-4X65WL-QT-*	4' Wide	65W	8,100 Lumens
WA2-4X97WL-QT-*	4' Wide	97W	11,500 Lumens
WA2-4X114WL-QT-*	4' Wide	114W	13,140 Lumens

*Specify 30K, 35K, 40K, 50K

OPTIONS (Factory Installed)

EM5	- 5W, 600 Lumen Emergency Ballast
EM7	- 7W, 840 Lumen Emergency Ballast
EM10	- 10W, 1200 Lumen Emergency Ballast
WP6	- 6' 3-Wire Whip
CS6	- 6' Cordset
10YR	- 10 Year Warranty

