

SPECIFICATIONS

INDOOR

HOUSING

- Heavy gauge die-formed cold rolled steel housing
- White powder coated
- Available in 2', and 4' housings
- White finish
- Lens snaps into tabs

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V Dimmable driver standard
- Operating Temperature: -22°F - 104°F (-30°C - 40°C)
- 50,000 hours @ L70

OPTICAL SYSTEM

- Frosted polycarbonate lens
- CRI ≥80
- Power Factor >.98
- MCT: Selectable between 3500K/4000K/5000K

MOUNTING

- Surface/wall mount

CODE COMPLIANCE

- cULus Listed for Damp Locations

WARRANTY

- 5 Year




WMBC-W LED Wall Bracket

ORDERING INFORMATION


MODEL #	Size/Wattage	Driver	CT
WMBC-W-2X1L-QT-MCT	2' / 10W/15W/20W (1150/1725/2300 Lms)	QT	35K/40K/50K
WMBC-W-4X1L-QT-MCT	4' / 20W/30W/40W (2300/3450/4600 Lms)	QT	35K/40K/50K

OPTIONS (Factory Installed)


- EM** - Emergency Battery
- OCS** - Motion Sensor

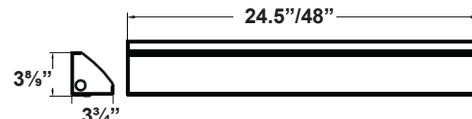

WMBC-W-2X1L

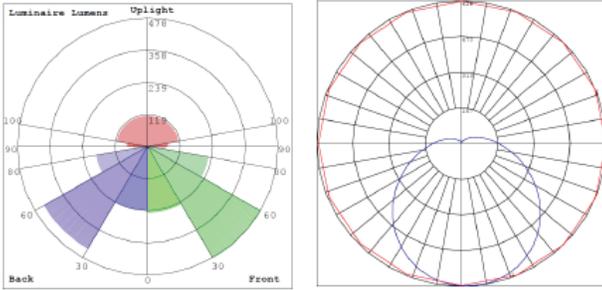


BUD Rating: B1-U3-G1

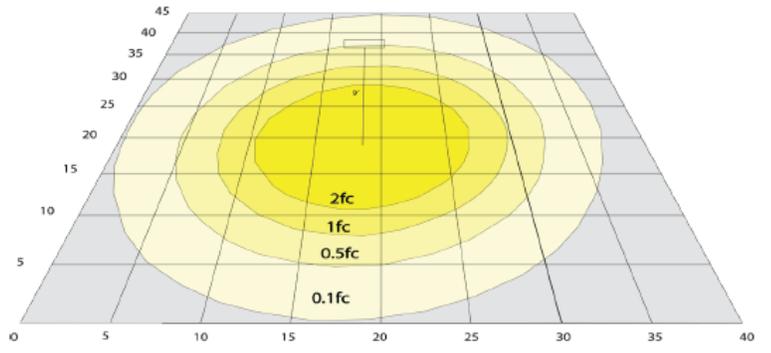


Area 45'x 40' Mounting Height: 9'

WMBC-W-4X1L

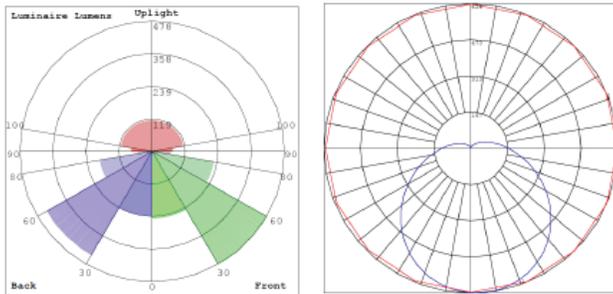

BUD Rating: B1-U3-G1

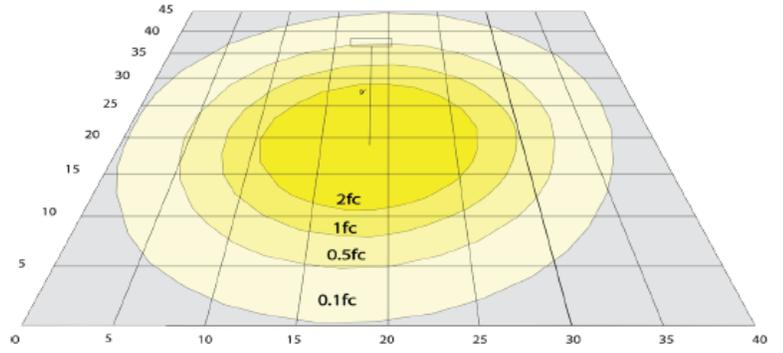

Area 45'x 40' Mounting Height: 9'