

SPECIFICATIONS

OUTDOOR

HOUSING

- Cast aluminum housing
- Bronze powdercoat finish
- Nickel-plated stainless steel hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V Dimmable driver standard
- 347-480V Driver available
- Operating Temperature: -40°C (-40°F) - 40°C (104°F)
- 213,000 hours @ L₇₀
- 6kV Surge Protection standard
- Power factor > .90
- THD <20%

OPTICAL SYSTEM

- Tempered clear flat glass lens
- Aluminum boards
- Available in 3000K or 4000K
- Type V Distribution
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- CRI>80

MOUNTING

- Cast-in template for mounting directly over 4" recessed box, or use 1/2" surface conduit

CODE COMPLIANCE

- cETLus Listed for Wet Locations
- UL1598, 8750
- IP65 Rated
- BAA Compliant

WARRANTY

- 5 Year



WP31-Q
Up / Down
LED Wall Pack


ORDERING INFORMATION


CATALOG #	Wattage	Lumens
WP31-Q-16L-QT-*	16W (16W Down)	1694 Lumens
WP31-Q-32L-QT-*	32W (16W Up/16W Down)	3387 Lumens

*Specify CCT: 30K, 40K

OPTIONS (Factory Installed)

EM	- Battery Backup (not available with 480V)
EMCW	- Cold Weather Battery Backup (-20°C) - not available with 480V
OCS	- Microwave Sensor with Dimming (8' - 40' mounting) - not available with 480V
480V	- 480V Driver (replaces QT in part number) - 32L model only
PC	- 120-277V Photocell
SGP1	- 10 kV Surge Protection - 120/277V
SGP2	- 20 kV Surge Protection - 120/277V
SGP3	- 10kV Surge Protection - 347-480V
SGF	- Single Fuse (not available with 480V)
DBF	- Double Fuse (not available with 480V)
CC	- Custom Color

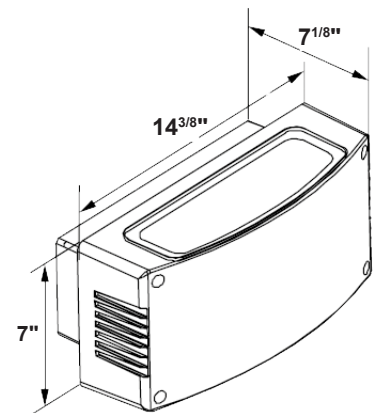

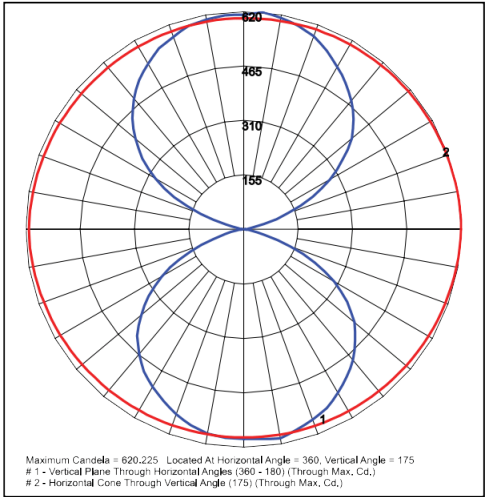

WP31-Q-32L-QT-40K