

SPECIFICATIONS

OUTDOOR

HOUSING

- Heavy duty die cast aluminum housing
- Bronze powdercoat bronze finish
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket
- 1/2" coin plugs with O-rings for conduit and photocell

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- 480V available
- 0-10V Dimmable driver standard
- -40°C - 40°C (-40°F - 104°F)

OPTICAL SYSTEM

- Clear and Prismatic glass lenses available
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- Type V distribution
- 213,000 Hours @ L₇₀

ILLUMINATION

- 25W Input Wattage

MOUNTING

- Cast-In template for mounting directly over a 4" recessed outlet box, or use 1/2" surface conduit

CODE COMPLIANCE

- cSAus Listed for Wet Locations
- Meets UL Requirements
- IP65 Rated
- Wildlife Lighting Certified (with optional baffle) - Cert #2018-001
- Turtle-Safe (with optional baffle)

WARRANTY

- 5 Year

ORDERING INFORMATION



CATALOG #	Lumens	Certification
WP49-Q-22L-QT-AMB-CL	794	
WP49-Q-22L-QT-AMB-CL-BAF	794	Wildlife Certified

OPTIONS (Factory Installed)


EBLED	-	Battery Backup
EBLEDCW	-	Cold Weather Battery Backup (not available on 480V models)
480V	-	347-480V Driver
PC1	-	120-277V Photocell
SGP	-	Surge Protection
SGF	-	Single Fuse
DBF	-	Double Fuse
CC	-	Custom Color
10YR	-	10 Year Warranty



WP49-Q-AMB Small Full Cutoff Amber LED Wall Pack

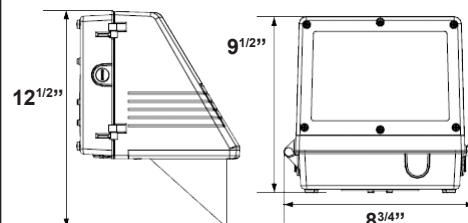

PHOTOMETRICS

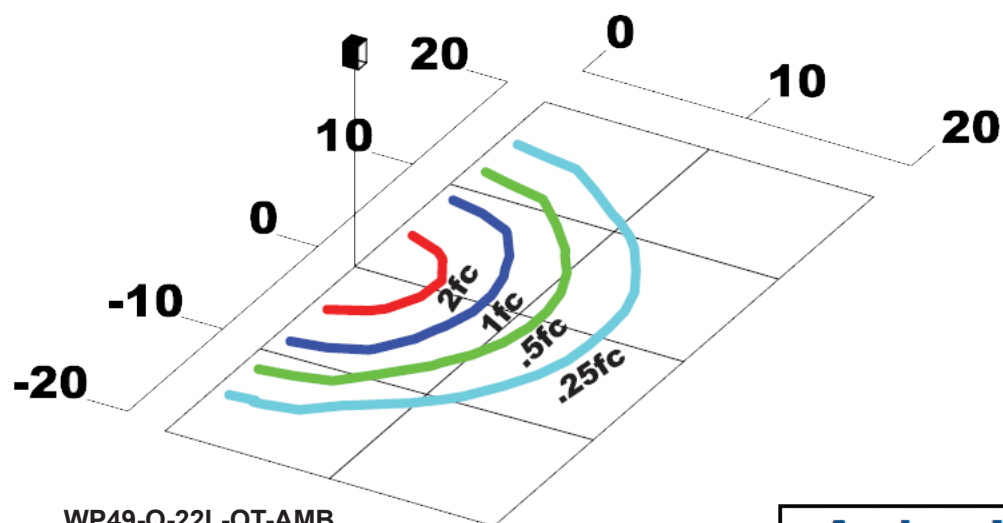

WP49-Q-22L-QT-AMB
Mounting Height = 10ft

Amber LED - Spectral Chart

