

## SPECIFICATIONS

OUTDOOR

### HOUSING

- Die cast aluminum housing
- Stainless steel hardware
- Available in bronze, white, black, and silver housing
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket
- Integral heat sink for maximized heat dissipation
- Mounts to a 3 1/2" or 4" square electrical J-box

### ELECTRICAL

- Quad Tap (QT) - 120-277V
- 480V available
- 0-10V Dimmable driver standard
- Operating Temperature: -40°C (-40°F) - 40°C (104°F)
- 50,000 hours @ L<sub>70</sub>
- 10kV Surge Protection available
- BUG Rating
  - B: 1
  - U: 0
  - G: 1

### OPTICAL SYSTEM

- UV-Stabilized Polycarbonate lens
- 3000K, 4000K, 5000K
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- CRI ≥ 70

### CODE COMPLIANCE

- cULus Listed for Wet Locations

### WARRANTY

- 5 Year

## ORDERING INFORMATION

| MODEL # | Wattage | Driver            | CCT | Distribution    | Housing     |
|---------|---------|-------------------|-----|-----------------|-------------|
| WP53-E  | 15L     | QT                | 30K | T3              | BZ (Bronze) |
|         | 25L     | 480V <sup>2</sup> | 40K | T4 <sup>1</sup> | BK (Black)  |
|         | 40L     |                   | 50K |                 | WH (White)  |
|         | 70L     |                   |     |                 | SL (Silver) |
|         | 100L    |                   |     |                 |             |

<sup>1</sup>T4 not available on 15L models

<sup>2</sup>Not available on 15L/25L models (SGP2 is only option available with 480V models)

### Options (Factory Installed)

|             |                                                                                     |
|-------------|-------------------------------------------------------------------------------------|
| <b>35K</b>  | - 3500K (extended lead times)                                                       |
| <b>EM</b>   | - 90 Minute Emergency Backup (not available with 15L models)                        |
| <b>EMCW</b> | - 90 Minute Cold Weather Emergency Backup (not available with 15L/25L models) -20°C |
| <b>PC</b>   | - 120/277VAC Button Photocell                                                       |
| <b>SGP1</b> | - 10kVA 120/277V Surge Protection                                                   |
| <b>SGP2</b> | - 10kVA 347/480V Surge Protection                                                   |


### Accessories (Order Separately, Ships on Side)

- WP53-E-REM** - Remote for OCS
- WP53-E-OCS-\*** - Bluetooth Motion Sensor (not available with 15L/25L models)

\*Specify Color: **BZ** - Bronze, **BK** - Black, **GY** - Gray, **WH** - White



## WP53-E LED Wallpack

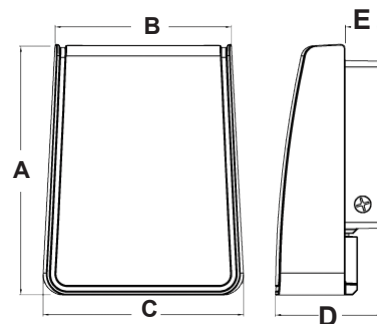


| Model | A     | B     | C     | D    | E    |
|-------|-------|-------|-------|------|------|
| 15L   | 6.7"  | 5.0"  | 5.6"  | 3.2" | 1.4" |
| 25L   | 8.0"  | 5.7"  | 6.0"  | 3.2" | 1.4" |
| 40L   | 10.2" | 6.8"  | 7.8"  | 5.0" | 1.9" |
| 70L   | 11.6" | 8.3"  | 9.4"  | 5.0" | 1.9" |
| 100L  | 11.6" | 10.3" | 11.5" | 5.0" | 1.9" |

LUMEN INFORMATION

| Model       | Type III  |           |           | Type IV |           |           |
|-------------|-----------|-----------|-----------|---------|-----------|-----------|
|             | 3000K     | 4000K     | 5000K     | 3000K   | 4000K     | 5000K     |
| WP53-E-15L  | 1531 Lm   | 1534 Lm   | 1745 Lm   | N/A     | N/A       | N/A       |
| WP53-E-25L  | 2795 Lm   | 2997 Lm   | 3198 Lm   | 2609 Lm | 2797 Lm   | 2985 Lm   |
| WP53-E-40L  | 4389 Lm   | 4705 Lm   | 5021 Lm   | 4021 Lm | 4310 Lm   | 4599 Lm   |
| WP53-E-70L  | 7657 Lm   | 8193 Lm   | 8729 Lm   | 6837 Lm | 7316 Lm   | 7794 Lm   |
| WP53-E-100L | 10,871 Lm | 11,632 Lm | 12,393 Lm | 9706 Lm | 10,385 Lm | 11,065 Lm |

PHOTOMETRICS

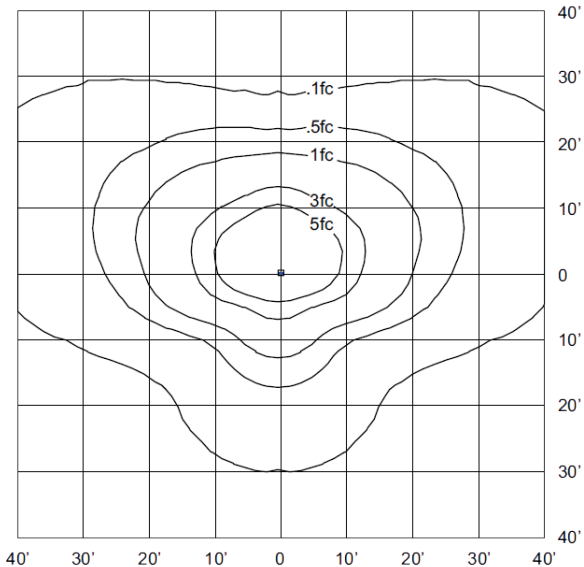

WP53-E-40L-QT-50K-T3  
10' Mounting Height