

SPECIFICATIONS

OUTDOOR

HOUSING

- Heavy duty die cast aluminum housing
- Housing is adjustable up to 90°
- Bronze powdercoat finish
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket
- Fur knockouts: top, back, both sides

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V Dimmable
- Operating Temperature: -4°F - 104°F (-20°C - 40°C)

OPTICAL SYSTEM

- Shatterproof polycarbonate lens
- Type II
- Beam angle 80° x 90°
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- CRI>80
- 70,000 hours @ L₇₀

CODE COMPLIANCE

- UL Listed for Wet Locations
- IP65 Rated
- Dark Sky Compliant

WARRANTY

- 5 Year



WP53.5-W LED Adjustable Wall Pack

ORDERING INFORMATION

CATALOG #	Description
WP53.5-W-12L-QT-*	12W, 1500 Lumens
WP53.5-W-1L-QT-MCT	Selectable 20W/30W/50W - 2950 - 6150Lm, 30K - 57K
WP53.5-W-2L-QT-MCT	Selectable 50W-120W, 7000 - 1500Lm, 30K - 57K


*Specify CCT: 30K, 40K, 50K

OPTIONS (Factory Installed)

EM	- External Emergency Battery Backup (12W Model)
EM2	- Internal Emergency Battery Backup (1L models)
EM3	- Internal Emergency Battery Backup (2L models)
PC	- Button Photocell
MOCS	- Programmable Bi-Level Microwave Occupancy Sensor
TPS	- Tamper Proof Screw
CC	- Custom Color
WH	- White Finish

ACCESSORIES (Order Separately)

WP53.5-W-SHD1	- Shroud for 12L Model
WP53.5-W-SHD2	- Shroud for 1L Model
WP53.5-W-SHD3	- Shroud for 2L Model
WP53.5-W-REM	- Remote for MOCS

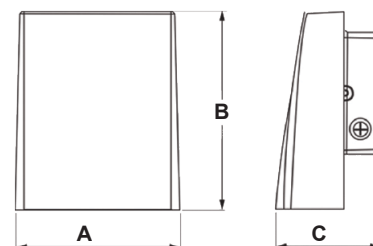


	A	B	C
12L	5"	6"	4"
1L	7 ³ / ₅ "	9"	4 ¹ / ₂ "
2L	11"	13"	6"

LUMEN INFORMATION


Catalog #	20W			
WP53.5-W-1L	3000K	4000K	5000K	5700K
	2950 Lm	3050 Lm	3150 Lm	3150 Lm
	30W			
	3000K	4000K	5000K	5700K
	3950 Lm	4050 Lm	4150 Lm	4150 Lm
	40W			
	3000K	4000K	5000K	5700K
	5000 Lm	5150 Lm	5300 Lm	5300 Lm
	50W			
	3000K	4000K	5000K	5700K
	5730 Lm	5850 Lm	6150 Lm	6150 Lm

Catalog #	50W			
WP53.5-W-2L	3000K	4000K	5000K	5700K
	7000 Lm	7200 Lm	7400 Lm	7400 Lm
	80W			
	3000K	4000K	5000K	5700K
	10,200 Lm	10,500 Lm	10,800 Lm	10,800 Lm
	100W			
	3000K	4000K	5000K	5700K
	12,000 Lm	12,300 Lm	12,650 Lm	12,650 Lm
	120W			
	3000K	4000K	5000K	5700K
	13,900 Lm	14,00 Lm	15,000 Lm	14,900 Lm


PHOTOMETRICS

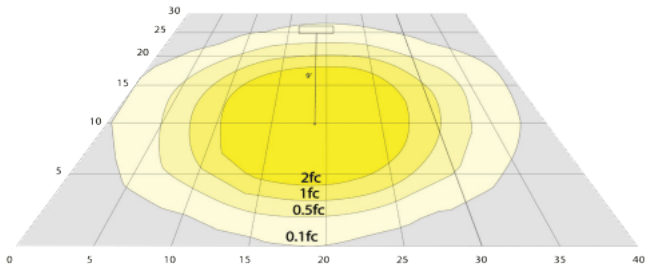

WP53.5-W-12L
Area 30' x 40' Mounting Ht: 9'

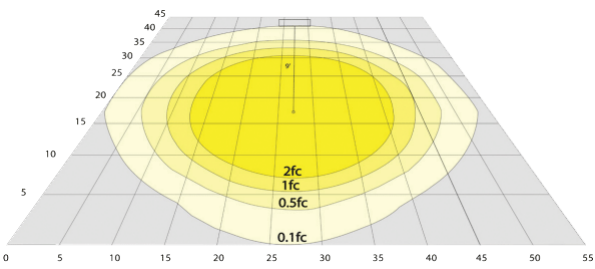

WP53.5-W-1L
Area 45' x 55' Mounting Ht: 9'

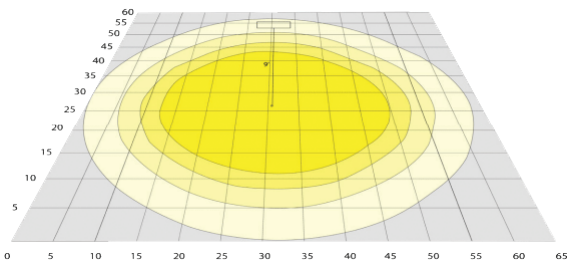

WP53.5-W-2L
Area 60' x 65' Mounting Ht: 9'