

SPECIFICATIONS

OUTDOOR

HOUSING

- Cast aluminum housing
- Dark bronze powdercoat finish
- Hinged door frame
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket
- Built in switchable photocell

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V Dimmable driver standard
- Operating Temperature: -40°C (-40°F) - 45°C (113°F)

OPTICAL SYSTEM

- Polycarbonate lens
- Type IV Distribution
- MCT (Selectable between 30K/40K/50K)
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- CRI>70

CODE COMPLIANCE

- cULus Listed for Wet Locations
- DLC Premium Approved
- FCC
- RoHS Compliant

WARRANTY

- 5 Year




WP54.5-C

Wattage and Color Selectable LED Wallpack

CATALOG #	Wattage	Lumens	CCT
WP54.5-C-1L-QT-MCT	20W / 30W / 40W	2860 - 5594 Lm	30K/40K/50K
WP54.5-C-2L-QT-MCT	25W / 45W / 55W	3275 - 7237 Lm	30K/40K/50K
WP54.5-C-3L-QT-MCT	60W / 80W / 110W	7920 - 14,169 Lm	30K/40K/50K

OPTIONS (Factory Installed)

- EM - Emergency Driver
- SGP - 10kV Surge Protection

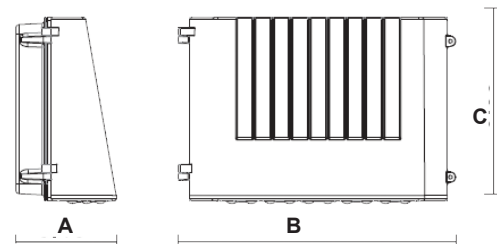

Model	A	B	C
1L	5.15"	14.23"	9.55"
2L	5.15"	14.23"	9.55"
3L	8.15"	14.23"	9.55"