

SPECIFICATIONS

OUTDOOR

HOUSING

- Heavy duty die cast aluminum housing
- Offered in bronze and white finish
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket
- Four 1/2" HUB

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 50/60 Hz
- Operating Temperature: -40°C - 40°C (-40°F - 104°F)

OPTICAL SYSTEM

- Prismatic Lens
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- Beam angle 110° x 65°
- CRI > 80
- PF > 0.95
- THD < 20%
- 70,000 Hours @ L₇₀

CODE COMPLIANCE

- cULus Listed for Wet Locations
- IP54

WARRANTY

- 5 Year



WP73-W
Small Wall Pack

ORDERING INFORMATION

CATALOG #	Wattage	Lumens	CCT
WP73-W-6L-QT-30K-*	6W	630 Lumens	3000K
WP73-W-6L-QT-50K-*	6W	660 Lumens	5000K

*Specify Color: **BZ**-Bronze, **WH**-White

OPTIONS (Factory Installed)

EM	- Emergency Battery Backup, Back Box (available in white and bronze)
EMPM	- Emergency Battery Back, Post Mount (available in white and bronze)
OCS	- Programmable Microwave BiLevel Sensor
BK	- Black Housing
GY	- Gray Housing
SV	- Silver Housing

ACCESSORIES (ships on side)

WP73-W-PST1	- 18" Single Sided Post (available in white and bronze)
WP73-W-PST2	- 18" Double Sided Post (available in white and bronze)
WP73-W-PST3	- 36" Single Sided Post (available in white and bronze)
WP73-W-PST4	- 36" Double Sided Post (available in white and bronze)



EM



OCS



PST1




PST2




PST3





PST4

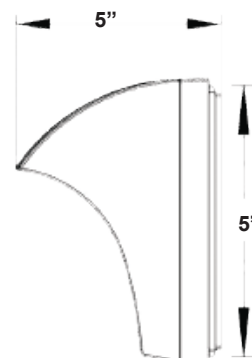



BUG Rating: B0-U2-G0

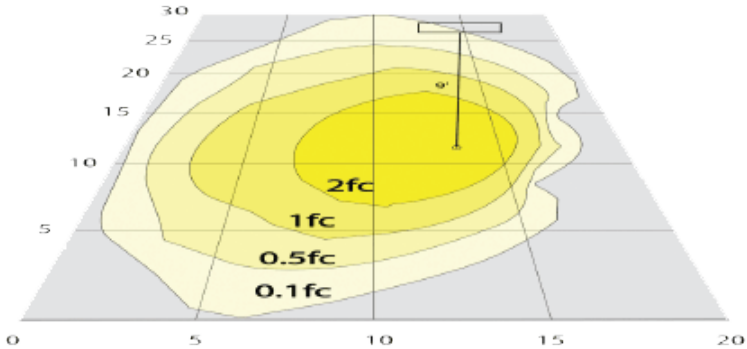

6W 3000K - Area 35' x 20' - Mounting Height: 9'