

SPECIFICATIONS

OUTDOOR

HOUSING

- Die-Cast aluminum housing
- Adjustable tilt from -10° down to 20° up
- Can be mounted to j-box facing down or up
- Conduit wall mount bracket available
- Dark bronze powdercoat finish standard
- Also available in white, black, gray, or custom finish
- Silicone rubber gasket
- Built in switchable photocell

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 277V-480V Available
- 0-10V Dimmable driver standard
- Photocell included with easy disconnect switch
- 6Kv Surge protection standard
- 70,000 hours @ L₇₀
- THD <20%
- PF > 0.9
- Operating Temperature: -40°C (-40°F) - 50°C (122°F)

OPTICAL SYSTEM

- Clear acrylic lens
- MCT (Selectable between 30K/40K/50K)
- Type III distribution standard; also available in type IV or V
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- CRI>80

CODE COMPLIANCE

- cULus Listed for Wet Locations
- IP66 Rated
- DLC Premium Approved
- FCC CFR 47
- RoHS Compliant

WARRANTY

- 5 Year

ORDERING INFORMATION

CATALOG #	Wattage	Lumens	CCT
WP74-EN-1L-QT-MCT	30W/ 50W/ 65W	4000 / 6250 / 7800 Lms	30K/ 40K/ 50K
WP74-EN-2L-QT-MCT	60W/ 80W/ 100W	8000 / 10,000 / 12,000 Lms	30K/ 40K/ 50K

OPTIONS (Factory Installed)

BK	- Black Housing (bronze standard)
WH	- White Housing (bronze standard)
GY	- Gray Housing (bronze standard)
CC	- Custom Color (bronze standard)
480V	- 277-480V Driver
T4	- Type IV (Type III standard)
T5	- Type V (Type III standard)
OCS	- Bi-Level Motion and Daylight Sensor
OCSBT	- Bi-Level Motion and Daylight Sensor with Bluetooth Control
EM	- Emergency Ballast
SGP	- 20kV Surge Protection (6Kv standard)


ACCESSORIES (Ships on the Side)

REM2-EN	- Sensor Remote
---------	-----------------



WP74-EN Wattage and Color Selectable LED Wallpack

1L

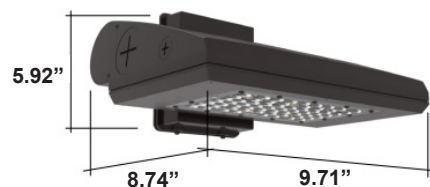

2L

