

SPECIFICATIONS

MULTI FAMILY

HOUSING

- Heavy duty die cast aluminum housing
- Flush mount easy-hang wall bracket
- Built-In level
- Internal heat sinking and driver compartment
- Bronze or black powdercoat finish
- Photocell adaptable

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- Dimmable driver standard
- 347V also available
- Operating Temperature: -40°C (-40°F) - 40°C (104°F)

OPTICAL SYSTEM

- Clear inner lens
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- 187,000 Hours @ L₇₀
- CRI: 80
- 4000K and 5000K available

ILLUMINATION

- 16.6W LED
- 20.2 System Watts
- ~70W HID

MOUNTING

- Cast-In template for mounting directly over a 4" recessed outlet box
- Easy hang wall bracket included

CODE COMPLIANCE

- cSA Listed for Wet Locations
- Meets UL Requirements
- IP66 Rated
- Assembled in USA Available

WARRANTY

- 5 Year
- 10 Year Available

ORDERING INFORMATION

CATALOG #	LUMENS	DISTRIBUTION	COLOR
WSC2-Q-RD-16L-QT-40K-CL	1,539	Type V	4000K
WSC2-Q-RD-16L-QT-40K-DL	1,462	Type V	4000K
WSC2-Q-RD-16L-QT-50K-CL	1,603	Type V	5000K
WSC2-Q-RD-16L-QT-50K-DL	1,523	Type V	5000K
WSC2-Q-SQ-16L-QT-40K-CL	1,611	Type V	4000K
WSC2-Q-SQ-16L-QT-40K-DL	1,530	Type V	4000K
WSC2-Q-SQ-16L-QT-50K-CL	1,678	Type V	5000K
WSC2-Q-SQ-16L-QT-50K-DL	1,594	Type V	5000K

OPTIONS (Factory Installed)

BLK	-	Black Housing
PC3	-	120-277V Photocell
SGP	-	Surge Protection
SGF	-	Single Fuse
DBF	-	Double Fuse
347V	-	347V Driver
10YR	-	10 Year Warranty
CC	-	Custom Color
USA	-	Assembled in USA





WSC2-RD




WSC2-SQ


WSC2-Q Round and Square LED Wall Sconce

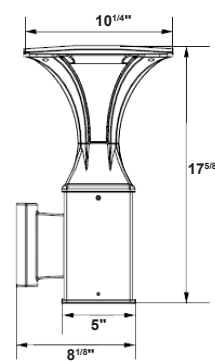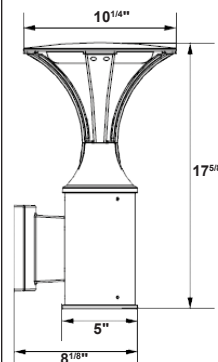

PHOTOMETRICS

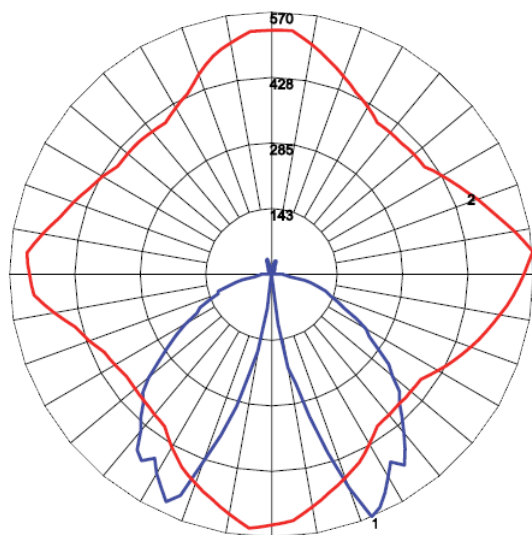

WSC2-Q-RD-16L-QT-50K

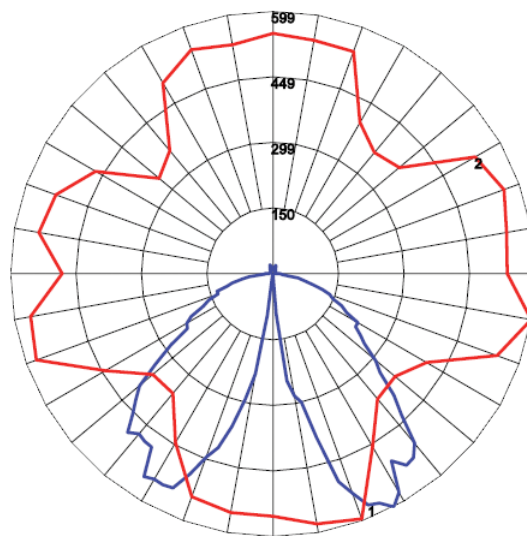

WP64-Q-SQ-17L-QT-50K