

SPECIFICATIONS

OUTDOOR

HOUSING

- Extruded aluminum housing with flush mount
- Black or bronze finish
- 360° distribution or 120° or 180° shield

ELECTRICAL

- QT
- THD < 20%
- Power Factor > .90
- 0-10V Dimming Standard
- 2kV Surge Protection Standard

ILLUMINATION

- Clear UV-Stabilized Polycarbonate Vandal-Resistant Lens
- 3000K, 4000K, or 5000K
- 10W, 12W, 16W, and 17W models available
- 338 lms - 758 lms

MOUNTING

- Mount over a 4" Recessed Outlet Box

CODE COMPLIANCE

- cCSAus listed for wet locations
- Meets UL Requirements
- IP66

WARRANTY

- 5 Year



WSC38-Q LED Wall Sconce

ORDERING INFORMATION

CATALOG #	Description
WSC38-Q-10AL-QT-#-*	10W, 338 lms - 366 lms, 120-277V, 120° Shield
WSC38-Q-10BL-QT-#-*	10W, 338 lms - 366 lms, 120-277V, 180° Shield
WSC38-Q-12L-QT-#-*	12W, 479 lms - 541 lms, 120-277V, 360° Distribution
WSC38-Q-16AL-QT-#-*	16W, 508 lms - 549 lms, 120-277V, 120° Shield
WSC38-Q-16BL-QT-#-*	16W, 508 lms - 549 lms, 120-277V, 180° Shield
WSC38-Q-17L-QT-#-*	17W, 671 lms - 758 lms, 120-277V, 360° Distribution
*Specify CCT: 30K, 40K, 50K	
*Specify Finish: BK-Black, BZ-Bronze	

OPTIONS (Factory Installed)


- EM - 90 Minute Battery Backup
- EM-CW - Cold Weather 90 Minute Battery Backup


ACCESSORIES (Ships on Side)

- WSC38-BZ - Empty Die Cast Bronze Accessory Housing
- WSC38-BK - Empty Die Cast Black Accessory Housing




Fixture With Battery Backup

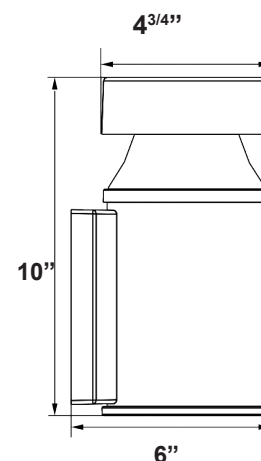

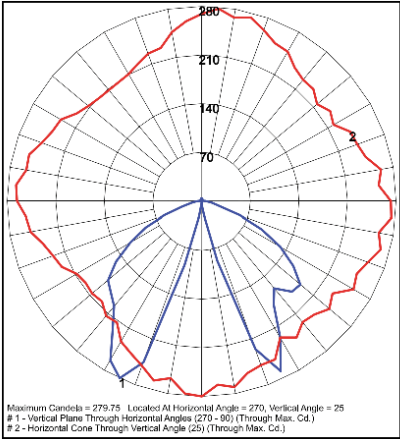

WSC38-Q-17L-QT-40K

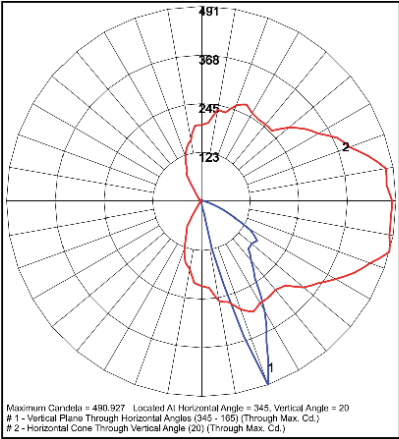

WSC38-Q-16BL-QT-40K