

SPECIFICATIONS

MULTI FAMILY

HOUSING

- Diecast aluminum housing with corrosion free powder coat
- Black or white finish
- Mounts to a 3" or 4" j-box

ELECTRICAL

- Quad Tap (QT) 120-277V
- Dimmable
- 6kV Surge Protection
- Pf > .90
- THD <20%
- 50,000 hours @ L₇₀
- Operating Temperature: -40°F - 122°F (-40°C - 50°C)

OPTICAL SYSTEM


- Clear glass lens
- Beam angle: 120°
- Up & Down, Up, or Down light direction
- 5CT: Selectable between 2700K/3000K/3500K/4000K/5000K
- CRI>90

CODE COMPLIANCE

- cETLus Listed for Wet Locations
- Title 24 / JA8 Compliant
- FCC Compliant
- IP65

WARRANTY

- 5 Year

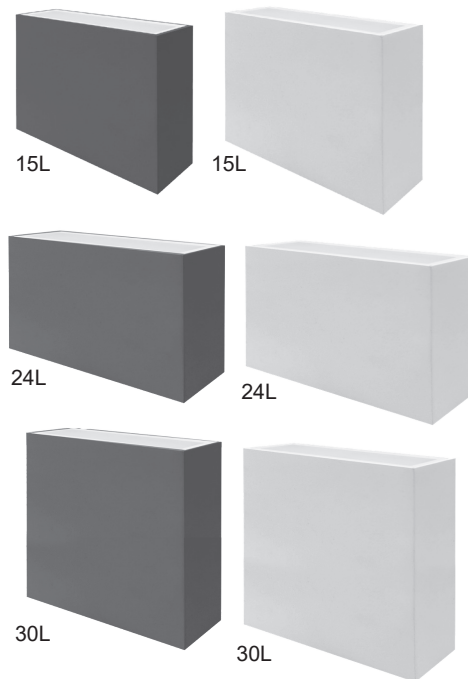



WSC55-EN LED Wet Location Up/Down Sconce

ORDERING INFORMATION


CATALOG#	Wattage	Driver	CCT	Color
WSC55-EN	15L (1000: 500 Lms Up/Down)	QT	5CT (27K/30K/35K/40K/50K)	BK (Black)
	24L (2400: 1200 Lms Up/Down)			WH (White)
	30L (2700: 1350 Lms Up/Down)			

Dimensions shown on 2nd page


DIMENSIONS

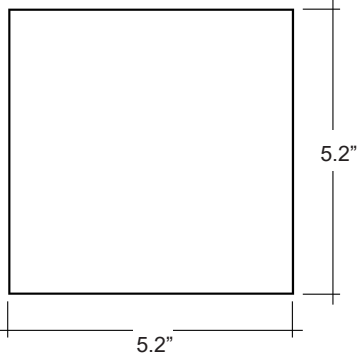

15L

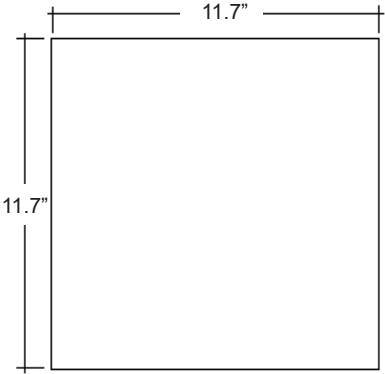

24L

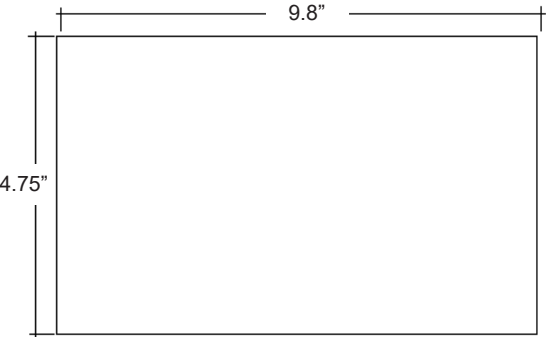

30L