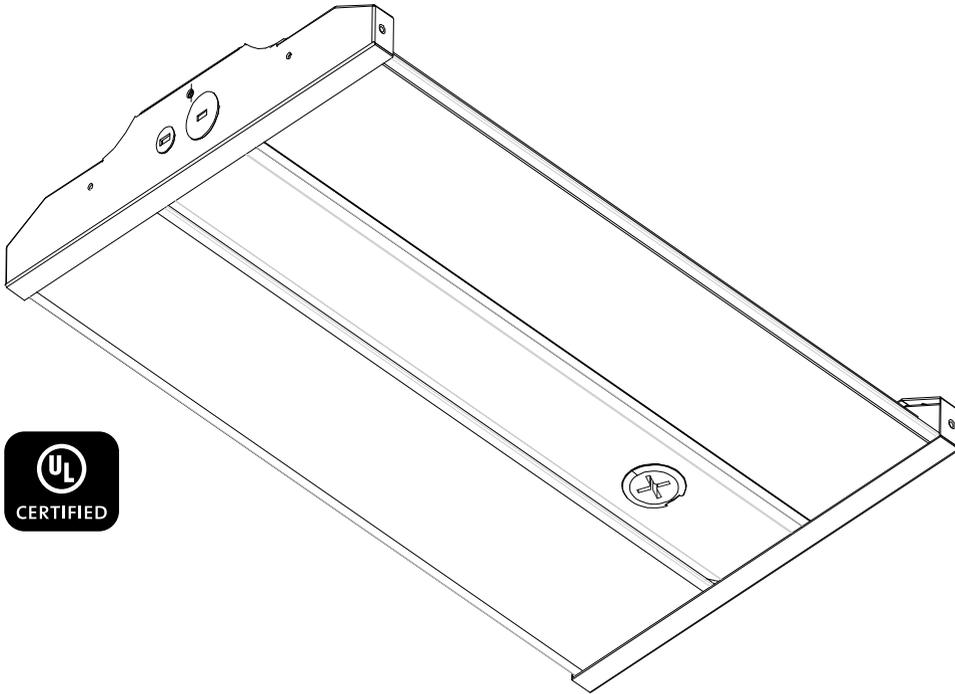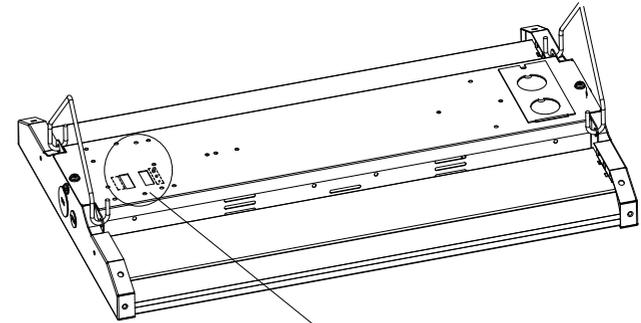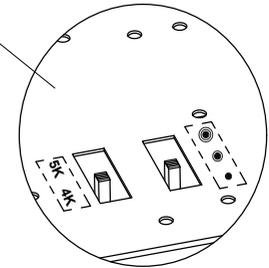# LED High Bay Luminaire

UL CERTIFIED

CAUTION:
1. Read all instructions before starting installation.
2. This product must be installed in accordance with the applicable installation codes by a qualified electrician familiar with the construction and operation of the product and the hazards involved.
3. Disconnect power at circuit breaker of fuse before starting installation.
4. To avoid injury, wear gloves during installation.
5. To reduce the risk of electrical shock and product damage, do not install this luminaire during rain or other storms.
6. Do not test luminaire using an electric generator before installation.
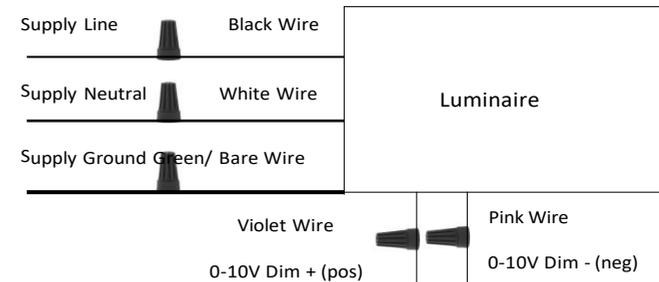
Installation Instruction

Remove switch cover and slide swiches to desired lumens and CCT

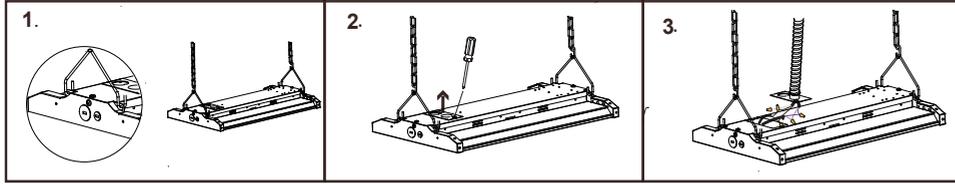Default factory setting is 4000K at higherst lumens output

Wiring Diagram

Supply Line	Black Wire	
Supply Neutral	White Wire	Luminaire
Supply Ground	Green/ Bare Wire	

Violet Wire — Pink Wire

0-10V Dim + (pos)   0-10V Dim - (neg)

For dimming wires, use class 1 wiring methods.
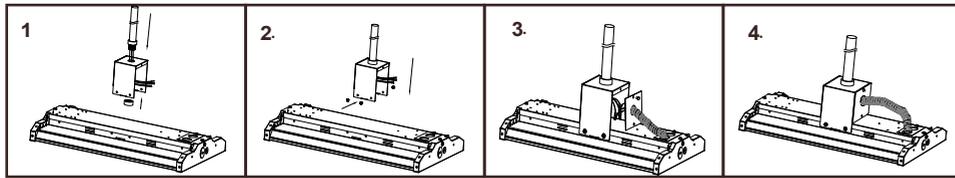Cap dimming wires (separately) if not used.

SAVE THESE INSTRUCTIONS

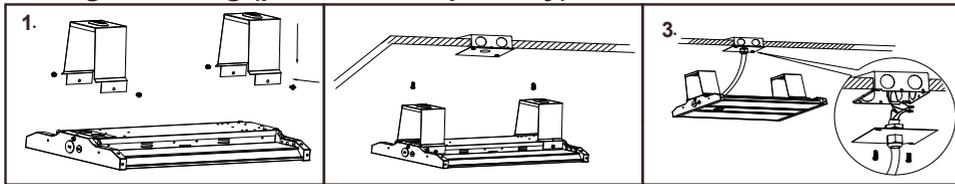# Installation Instruction

Chain and hook pendant mount

1. Take out the lamp and installation accessories.("V" Hook wire*2 / hanging chain*2)
2. Attach the "V" hooks to the chain then attache the "V" hooks on the liminiare slots and hang the chain to a structure that can sustain the luminiare whight.
3. Attach the conduit to the luminiare wiring box door, make the electrical connections according with the wiring diagram and secure the wiring box door to the luminiare to complete installation

Stem Pendant mount (purchased separately)

1. Attach stem conduit to the stem mount bracket
2. Secure stem mount braket into luminiare slots.
3. Attach flexible conduit conduit to the luminiare wiring box door, make the electrical connections according with the wiring diagram, then secure the wiring box door to the luminiare, the stem mount braket doors and stem mount braket to luminiare to complete installation
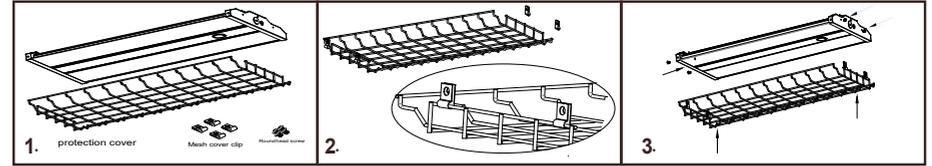
Ceiling mounting (purchased separately)

1. Fix the surface mount bracket with screws.
2. Install the fixture to the mount surface with screws.
3. Attach the conduit to the luminiare wiring box door, make the electrical connections according with the wiring diagram and secure the wiring box door to the luminiare to complete installation
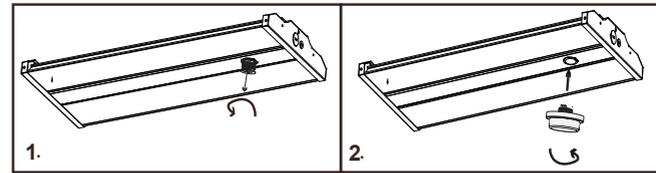
Accessories installation

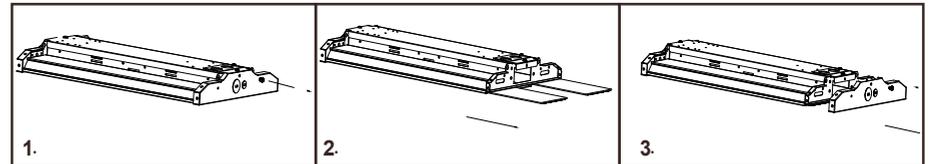## Installation of protective wire guard (purchased separately)

1. protection cover   Mesh cover clip   Roundhead screw

1. Take out the lamp mounting fittings and mounting screws.(Screw*4)
2. Insert provided clips (4 pcs.) onto wire guard.
3. Fasten the clips by screws into wire guard mounting goles.

Sensor installation (sold separately)

1. Unscrew the sensor base plug
2. Screw the sesor into senor base.

Lens replacement instructions

1.   Remove end cover screw and detach end cover.
2.   Slide out lens and replace.
3.   Mount back end cover.