


UL LED WALL PACK LIGHT INSTALLATION INSTRUCTION

SAFETY INSTRUCTION

- Read instructions carefully before attempting to install fixture. Retain instruction for future reference.
- Disconnect power before installing or servicing. This fixture must be wired in accordance with the National Electrical Code and applicable local codes and ordinances.
- All wiring should be performed by a qualified electrician. This fixture is for outdoor use and should not be used in areas with limited ventilation or high ambient temperatures.

INSTALLATION- Box Mounting

1. Loosen Housing Screws and remove Mounting Plate. Screws will remain in place with O-ring
2. Place Wall Gasket and Mounting Plate over recessed box, attention the UP (↑) direction. See figure 1.
3. Attach Mounting Plate with supplied Mounting Plate Screws.
4. Hang the fixture on the back plate. Connect wires into wiring terminal; white wire to “Neutral” terminal, black wire to “Live” terminal, green wire to “Ground” terminal; and fix them by screws; connect the ground wire to the back plate. See figure 2. Please mention the main specification as following before wiring. (See Table 1)
5. Check Housing Gasket. It should remain firmly around the inside of the Housing.

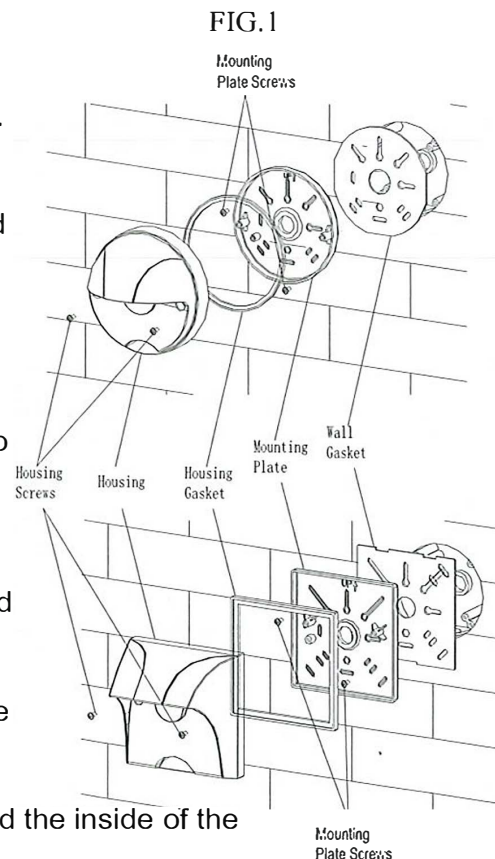

6. Align Housing to Mounting plate.
7. Make sure all gaskets are properly seated. Tighten Housing Screws. If outdoor surface is irregular, use caulk to seal any gaps around the Mounting Plate.
8. If outdoor surface is irregular, use caulk to seal any gaps around the Mounting Plate

APPLICATION ITEMS

