

CH3-D INSTALLATION INSTRUCTIONS

WARNING!

IMPORTANT SAFEGUARDS:

Read and Follow all safety instructions before Installation! Save these instructions and deliver to owner after installation.

IMPORTANT:

- Read all instructions carefully before attempting installation. If you do not understand these instructions, please consult your local distributor.
- 4
- Thoroughly inspect your fixture for any freight damage; freight damage should be reported to the delivery carrier.

MOUNTING

- 1. Dis-engage the cover latch to open the fixture. (See FIGURE 1)
- 2. Loosen the 4 bolts that tightens the stabilizer plate. (See FIGURE 2)
- 3. Mount the luminaire onto a pole through the opening next to the stabilizer plate.
- 4. Secure the pole under the stabilizer plate.
- 5. Tighten the 4 bolts on the stabilizer plate.
- 6. Close the cover and engage the cover latch.
- 7. Make wire connection.

WIRING CONNECTIONS

- 1. Connect the black fixture wire to the black supply wire (line).
- 2. Connect the white fixture wire to the white supply wire (neutral).
- 3. Connect the green fixture wire to the junction box ground wire.


TROUBLESHOOTING TIPS

- 1. Verify proper line voltage is present and wired to the correct input voltage lead.
- 2. Verify fixture wiring.
- 3. Verify fixture is grounded.
- 4. Optional: ensure the photocell is plugged in with the correct orientation (i.e. north on the fixture matches north on the photocell).
- 5. Optional: ensure the photocell is twisted clockwise to the maximum.
- 6. Optional: verify photocell wiring. (See FIGURE 3)





FIGURE 2



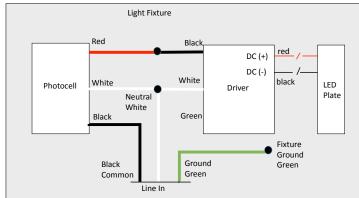


FIGURE 3

v1.0 © 2015