

## SPECIFICATIONS

INDOOR

### HOUSING

- Die cast aluminum housing
- Powdercoated white or bronze finish
- Includes hardwire connection or optional power cord
- Can be linked together
- Toggle switch on housing

### ILLUMINATION

- 5CT Selectable (27K,30K,35K,40K,50K)
- Frosted acrylic lens
- Beam Angle: 180°
- 50,000 Hours @L<sub>70</sub>

### ELECTRICAL

- 120V (dimnable down to 10%) or QT: 120-277 (0-10V dimmable)
- Includes hardwire connection or purchase optional power cord
- Optional integrated USB and USB-C
- Compatible with most dimmers down to 5%
- Operating Temperature: -4°F- 114°F (-20°C - 45°C)
- THD<20%, Pf >.90

### MOUNTING

- 3/8" conduit or 3-wire romex
- Mounting knockouts behind diffuser cover
- Built in screws for easy surface mounting

### CODE COMPLIANCE

- cETLus Listed for Damp Locations
- Title 24 Compliant
- FCC Compliant
- IC Rated

### WARRANTY

- 5 Year



## UC6-EN-5CT Color Selectable LED Under Cabinet

## ORDERING INFORMATION

### MODEL #


UC6-EN-8L-120V-5CCT-WH	8", 4W, 180 Lumens, 5CT, 120V
UC6-EN-11L-120V-5CCT-WH	11", 6W, 350 Lumens, 5CT, 120V
UC6-EN-11L-120V-5CCT-WH-USB	11", 6W, 350 Lumens, 5CT, 120V with USB-C
UC6-EN-14L-120V-5CCT-WH	14", 8W, 570 Lumens, 5CT, 120V
UC6-EN-14L-120V-5CCT-WH-USB	14", 8W, 570 Lumens, 5CT, 120V with USB-C
UC6-EN-14L-QT-5CCT-WH-USB	14", 8W, 570 Lumens, 5CT, 120V-277V with USB-C
UC6-EN-22L-120V-5CCT-WH	22", 10W, 750 Lumens, 5CT, 120V
UC6-EN-22L-120V-5CCT-WH-USB	22", 10W, 750 Lumens, 5CT, 120V with USB-C
UC6-EN-22L-QT-5CCT-WH-USB	22", 10W, 750 Lumens, 5CT, 120V-277V with USB-C
UC6-EN-28L-120V-5CCT-WH	28", 12W, 900 Lumens, 5CT, 120V
UC6-EN-28L-120V-5CCT-WH-USB	28", 12W, 900 Lumens, 5CT, 120V with USB-C
UC6-EN-28L-QT-5CCT-WH-USB	28", 12W, 900 Lumens, 5CT, 120V-277V with USB-C
UC6-EN-33L-120V-5CCT-WH	33", 15W, 1050 Lumens, 5CT, 120V
UC6-EN-42L-120V-5CCT-WH	42", 18W, 1250 Lumens, 5CT, 120V
UC6-EN-42L-120V-5CCT-WH-USB	42", 18W, 1250 Lumens, 5CT, 120V with USB-C
UC6-EN-42L-QT-5CCT-WH-USB	42", 18W, 1250 Lumens, 5CT, 120V-277V with USB-C


### OPTIONS (Factory Installed)

- BZ** - Bronze Housing (replaces WH in part number) - only available on 120V models with no USB


### ACCESSORIES (Order Separately, Ships on Side)

UC6-EN-JBOX	- White Junction Box
UC6-EN-PC5-WH	- 5' White Power Cable
UC6-EN-PC5-BZ	- 5' Bronze Power Cable
UC6-EN-LC6NW	- Linkable Connector with 6" Wire - White
UC6-EN-LC6NB	- Linkable Connector with 6" Wire - Bronze
UC6-EN-LC12NW	- Linkable Connector with 12" Wire - White
UC6-EN-LC12NB	- Linkable Connector with 12" Wire - Bronze
UC6-EN-LC24NW	- Linkable Connector with 24" Wire - White
UC6-EN-LC24NB	- Linkable Connector with 24" Wire - Bronze

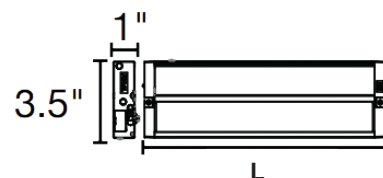





8 Inch

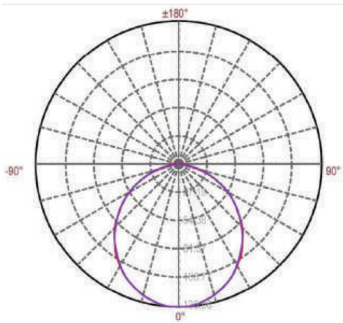


11 Inch




14 Inch




22 Inch



28 Inch



33 Inch



42 Inch