

SPECIFICATIONS

INDOOR

HOUSING

- Molded polycarbonate housing
- Silicone gasket with memory retention
- Polycarbonate latches secure lens to housing
- 9 lbs

ELECTRICAL

- (2) High efficiency LED boards
- Available in 3000K, 3500K, 4000K, and 5000K
- Drivers available: 50W and 70W
- Thermally protected electronic QT (120-277) ballast
- Available in 347V and 480V
- 60,000 hours @ L70
- 0-10V Dimming standard
- Operating Ambient Temperature: -40°C - 40°C (-40°F - 104°F)

OPTICAL SYSTEM

- White powder coat steel reflector
- High performance UV stabilized polycarbonate diffuser
- CRI > 80

MOUNTING

- Surface mount configuration standard with stainless steel mounting brackets
- Chain kit, pendant mount and air craft cable also available

CODE COMPLIANCE

- UL Certified
- IP66 Rated
- RoHS Compliant
- NSF Certified
- Title20 Compliant
- Title24 Compliant
- BAA Compliant
- DLC Premium Listed

WARRANTY

- 5 Year
- 10 Year available



VT6-LED LED Vapor Tight

ORDERING INFORMATION

CATALOG#	Wattage	Driver	Color
VT6-LED	35L (35W)	QT (120-277V)	3000K
	40L (40W)		3500K
	55L (55W)		4000K
	60L (60W)		5000K


OPTIONS (Factory Installed)

EM10	- 10W Emergency Ballast (1440 Lumens)
480V	- 347-480V Driver (replaces QT in part number)
OCS	- External Occupancy Sensor
SGP	- Surge Protection
SSL	- Stainless Steel Latches
TPS	- Tamper Proof Screws
JBOX	- JBox Mount (changes unit from wet to damp location)

ACCESSORIES (Order Separately, Ships on Side)

VT6-GK50	- 50" Adjustable Aviation Cable
VT6-GK72	- 72" Adjustable Aviation Cable
VT6-SK12	- 12" Single Pendant Kit, White
VT6-SK24	- 24" Single Pendant Kit, White
VT6-SK48	- 48" Single Pendant Kit, White
VT6-SWK12	- 12" Single Swivel Pendant Kit, White
VT6-SWK24	- 24" Single Swivel Pendant Kit, White
VT6-SWK48	- 48" Single Swivel Pendant Kit, White
VT6-CK48	- 48" Chain Hang Kit
VT6-SB	- Pivot Mount
VT6-JBOX	- Junction Mount (Damp Location)

Lumen info on 2nd page

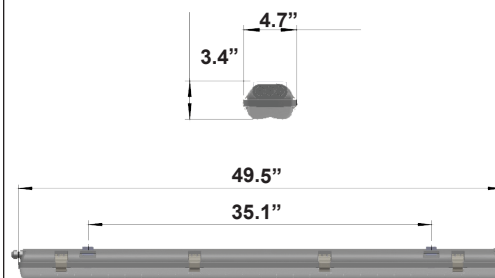

ELECTRICAL INFORMATION

LUMEN OUTPUT				
	3000K	3500K	4000K	5000K
VT6-35L	4,744	4,795	4,874	5,041
VT6-40L	5,786	6,159	6,536	6,909
VT6-55L	7,594	7,644	7,726	7,919
VT6-60L	8,679	9,233	9,782	10,351